



진공펌프-가스, 유기화학, 환경, 반도체


OEM vacuum pumps/compressors



TD05




BOXER

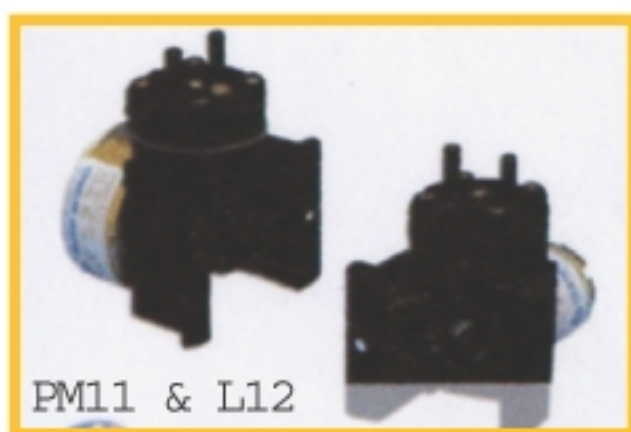

PM11 & L12



D3

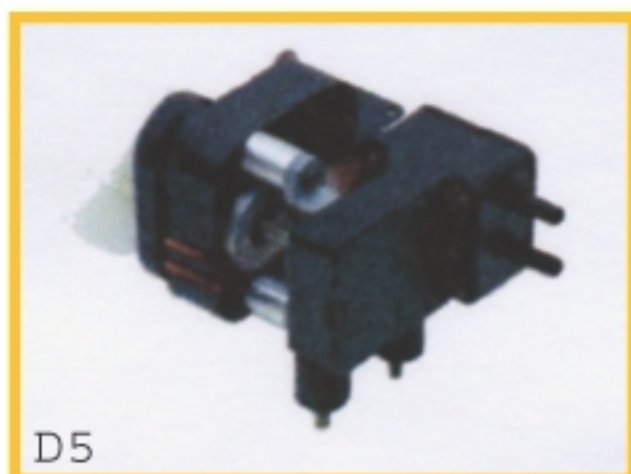

D5



CapexL2



D7



Capex V2



B100 SE
진공펌프



B85 DE
진공펌프



B85T
내산 PTFE 펌프



EX 30
방폭펌프



HH SERIES
고온가스 흡입펌프

Model reference	Pump type	Flow l/min	Vacuum		Pressure bar	Voltage			Options	
			mmHg	mbar		AC	DC	Brushless DC	case	portable
TD05	D	0.5	350	550	0.45		•			
L12	D	0.3	310	600	0.5	•				
PM11	D	1.8	325	580	0.6		•			
DA1 SE	D	2.0	460	400	1.2	•				
DA1 DE series connected	D	2.0	570	250	-	•				
DA1 DE parallel connected	D	3.5	460	400	1.0*	•				
D3	D	3.0	500	350	1.8		•	•		
D5 SE	D	5.0	620	190	2.0	•	•	•		
D5 DE series connected	D	5.0	720	50	-	•	•			
Capex L2	D	8.0	580	240	2.0	•			•	
D7 SE	D	15.0	580	240	2.0	•			•	
D7 DE series connected	D	15.0	700	80	-	•			•	
D7 DE parallel connected	D	30.0	580	240	2.0	•			•	
Capex V2 SE	D	17.0	580	240	2.2		•	•	•	
Capex V2 DE series connected	D	17.0	700	80	3.0*		•			
Capex V2 DE parallel connected	D	32.0	580	240	2.2		•			
B100 SE	D	18.0	550	280	2.5	•			•	•
B100 DE series connected	D	18.0	700	80	2.0*	•			•	•
B100 DE parallel connected	D	35.0	550	280	2.5	•			•	•
B105 SE	D	32.0	630	180	1.0*	•			•	•
B105 DE series connected	D	31.0	720	50	-	•			•	•
B105 DE parallel connected	D	56.0	630	180	1.0*	•			•	•
B85 SE	D	17.0	560	270	2.5	•			•	
B85 DE series connected	D	17.0	700	80	-	•			•	
B85 DE parallel connected	D	33.0	560	270	2.5	•			•	
B85T SE	D	20.0	715	60	-	•				•
B85T DE series connected	D	20.0	754	8.0	-	•				•
B85 SE HP	D	26.0	680	110	5.0	•				•
Capex L2HH heated head	D	7.0	550	280	1.0*	•				
B85 SEHH heated head	D	16.0	550	280	2.5	•				
B85 DEHH heated head	D	33.0	500	280	2.5	•				
EX7 explosion proof	D	7.0	410	430	1.2	•				
EX30 explosion proof	D	18.0	560	240	2.0	•				

*maximum working pressure