

Pressure & Vacuum

OLF260 / OLF295 SERIES

MODELS

OLF260AS09

2.5 BAR MAX .PRESSURE, 75 L/MIN FREE FLOW

OLF260AS12

2.5 BAR MAX .PRESSURE, 100 L/MIN FREE FLOW

OLF260DC08

7.0 BAR MAX .PRESSURE, 84 L/MIN FREE FLOW

OLF260AS09H

7.0 BAR MAX .PRESSURE, 75 L/MIN FREE FLOW

OLF295AS11

2.5 BAR MAX .PRESSURE, 116 L/MIN FREE FLOW

INCLUDES

Inlet filter

Unattached capacitor(DC motor exception)

RECOMMENDED ACCESSORIES

Vacuum gauge

Vacuum relief valve

Pressure gauge



Pressure relief valve



OLF260/OLF295

FLOW CURVES

(Metric, U.S./Imperial)

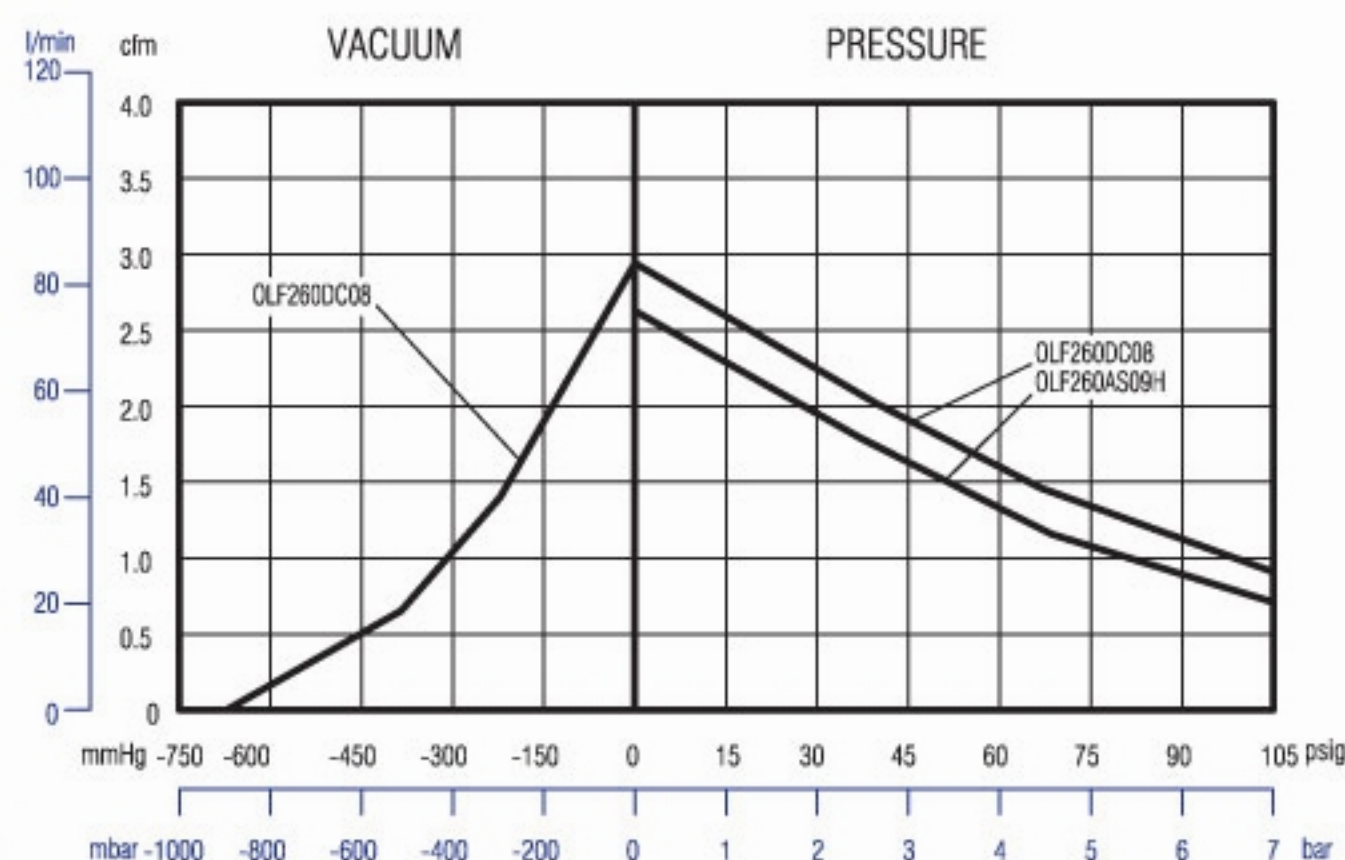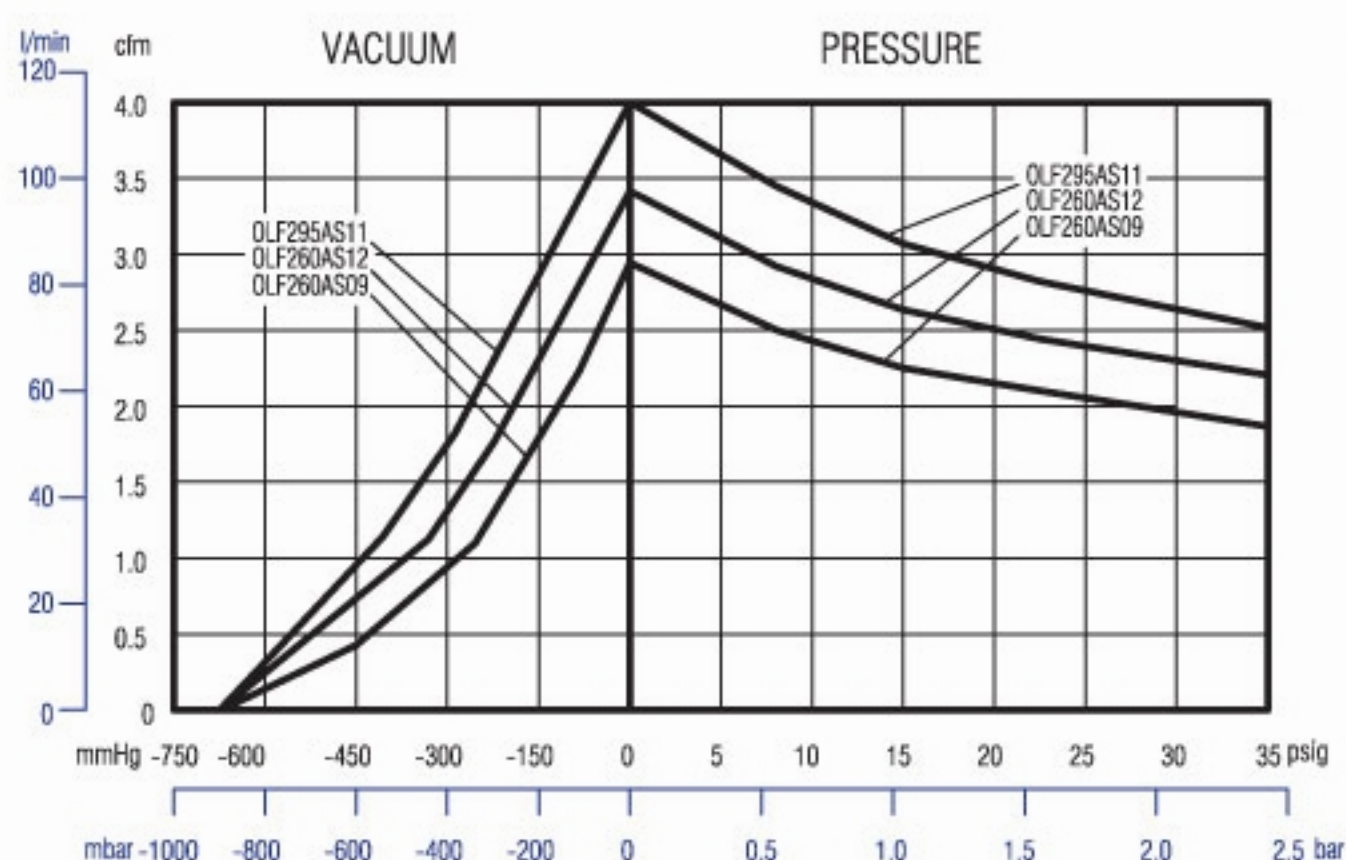

Product Performance

PRESSURE

MODEL	FREE FLOW (l/min)	MAX. PRESSURE (bar)	AMBIENT TEMPERATURE (°C)	MAX. RESTART PRESSURE (bar)	VOLTAGE/FREQUENCY (V/Hz)	POWER AT RATED LOAD (W)	CURRENT AT RATED LOAD (A)	MIN.FULL LOAD SPEED (rpm)	NET WEIGHT (kg)	DIMENSIONS L×W×H (mm)
OLF260AS09	75	2.5	5~40	0	220/60	300	1.4	1680	5.6	214×103×163
OLF260AS12	100	2.5	5~40	0	220/60	350	1.5	1680	6.0	234×103×163
OLF260DC08	75	7.0	5~40	4.0	DC12,24	250	20	1700	6.1	240×103×163
OLF260AS09H	75	7.0	5~40	0	220/60	300	1.4	1680	6.0	234×103×163
OLF295AS11	116	2.5	5~40	0	220/60	370	1.6	1680	6.2	234×103×163

VACUUM

MODEL	FREE FLOW (l/min)	MAX. VACUUM (mmHg)	AMBIENT TEMPERATURE (°C)	MAX. RESTART VACUUM (mmHg)	VOLTAGE/FREQUENCY (V/Hz)	POWER AT RATED LOAD (W)	CURRENT AT RATED LOAD (A)	MIN.FULL LOAD SPEED (rpm)	NET WEIGHT (kg)	DIMENSIONS L×W×H (mm)
OLF260AS09	75	685	5~40	0	220/60	180	0.7	1750	5.6	214×103×163
OLF260AS12	100	685	5~40	0	220/60	200	0.8	1750	6.0	234×103×163
OLF260DC08	84	650	5~40	0	DC12,24	120	10	2000	6.1	240×103×163
OLF295AS11	116	685	5~40	0	220/60	250	1.1	1750	6.2	234×103×163