

Pressure & Vacuum

OLF100 SERIES

MODELS

OLF100AS07

2.0 BAR MAX. PRESSURE, 40 L/MIN FREE FLOW



OLF100

INCLUDES


- ◆Inlet filter
- ◆Unattached capacitor

RECOMMENDED ACCESSORIES

- ◆Vacuum gauge
- ◆Vacuum relief valve
- ◆Pressure gauge
- ◆Pressure relief valve

FLOW CURVES

(Metric, U.S./Imperial)

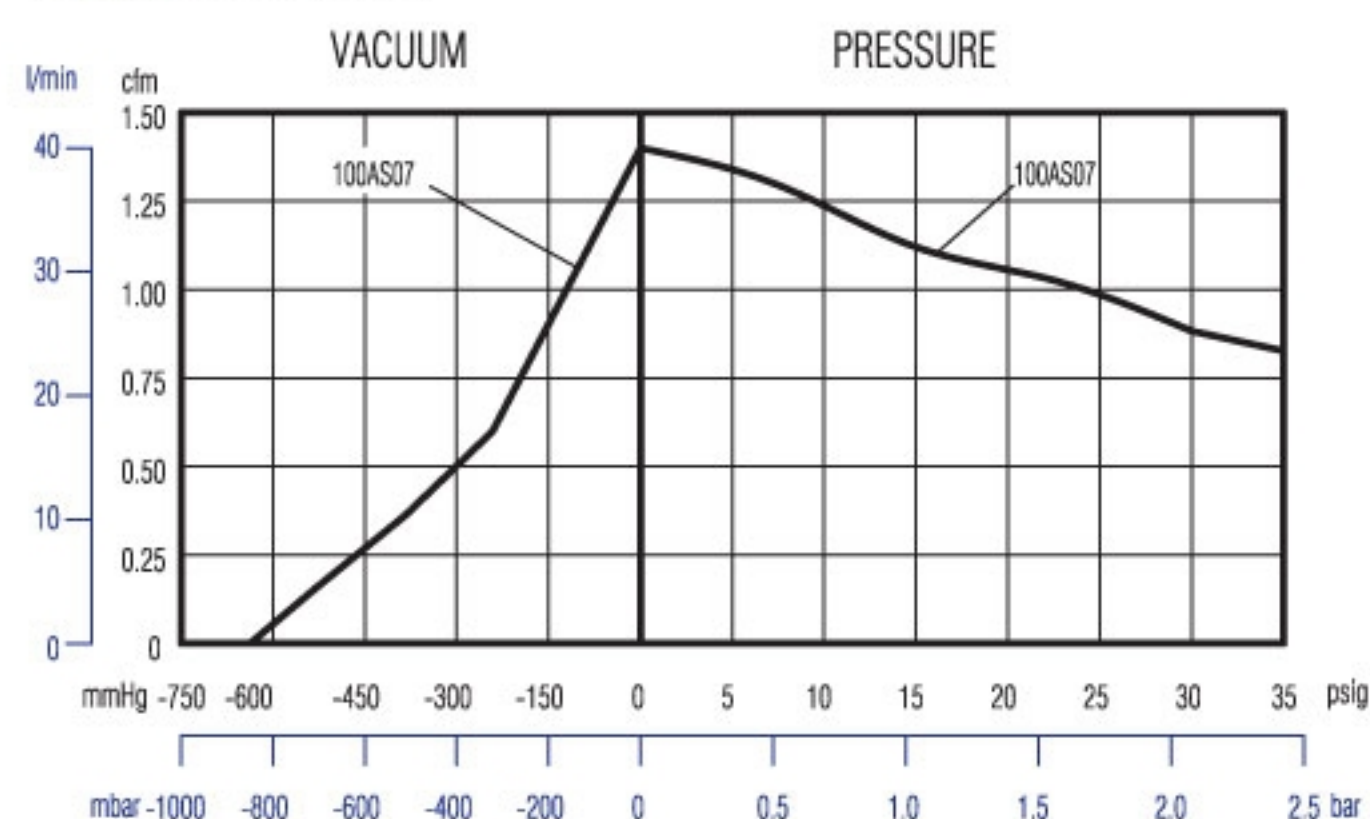

Product Performance

PRESSURE

MODEL	FREE FLOW (l/min)	MAX. PRESSURE (bar)	AMBIENT TEMPERATURE (°C)	MAX. RESTART PRESSURE (bar)	VOLTAGE/FREQUENCY (V/Hz)	POWER AT RATED LOAD (W)	CURRENT AT RATED LOAD (A)	MIN.FULL LOAD SPEED (rpm)	NET WEIGHT (kg)	DIMENSIONS L×W×H (mm)
OLF100AS07	40	2.0	5~40	0	220/60	130	0.6	1690	3.0	172×89×143

VACUUM

MODEL	FREE FLOW (l/min)	MAX. VACUUM (mmHg)	AMBIENT TEMPERATURE (°C)	MAX. RESTART VACUUM (mmHg)	VOLTAGE/FREQUENCY (V/Hz)	POWER AT RATED LOAD (W)	CURRENT AT RATED LOAD (A)	MIN.FULL LOAD SPEED (rpm)	NET WEIGHT (kg)	DIMENSIONS L×W×H (mm)
OLF100AS07	40	650	5~40	0	220/60	130	0.5	1720	3.0	172×89×143