


OIL-FREE SMALL COMPRESSORS KK70 SERIES 무급유콤프레샤

1. Continuous running
2. Long running life
3. Maintenance free

**A-100
B-100
A-200
B-200**

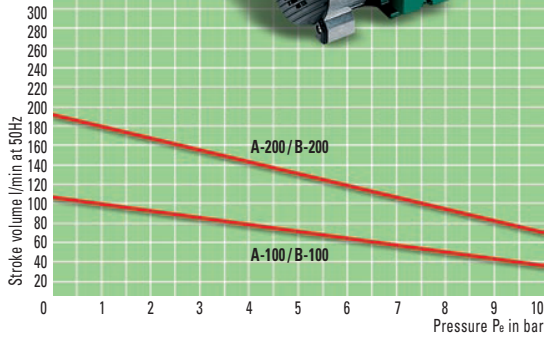


Type	Free air flow at 0 bar (l/min)	Nominal pressure PN (bar)	Noise level at PN dB (A)	Motor input P1 (W)	Performance data of motor Current consumption (A)	Voltage (V)	Frequency (Hz)	Protection class IP	Dimensions L x W x H (mm)
A-100	105	7	66	920	4,9	230	50/60	54	357 x 181 x 283
A-100	105	7	66	1030	12,9	110	50/60	44	335 x 195 x 280
B-100	105	7	66	1000	3,1	400	50/60	44	328 x 200 x 280
A-200	195	7	71	1870	6,0	230	50	44	445 x 205 x 295
B-200	195	7	71	1400	2,9	400	50/60	44	445 x 205 x 295

Compressors with DC motors upon request.

OIL-FREE COMPRESSORS MARATHON SERIES 무급유콤프레샤

1. Extreme long running life
2. Maintenance free
3. Continuous running

**A-080 A-234
B-080 B-304
A-160
B-160**

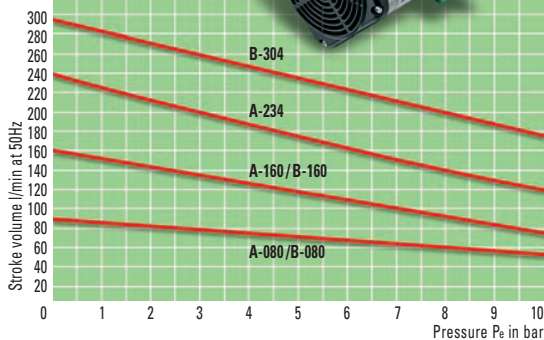


Type	Free air flow at 0 bar (l/min)	Nominal pressure PN (bar)	Noise level at PN dB (A)	Motor input P1 (W)	Performance data of motor Current consumption (A)	Voltage (V)	Frequency (Hz)	Protection class IP	Dimensions L x W x H (mm)
A-080	90	10	68	800	4,3	230	50/60	54	423 x 193 x 330
B-080	90	10	68	800	$\Delta 4,4 / \nabla 2,5$	230/400	50/60	54	420 x 180 x 300
A-160	160	10	71	1300	6,3	230	50/60	54	423 x 350 x 300
B-160	160	10	72	1400	$\Delta 5,4 / \nabla 3,1$	230/400	50/60	54	423 x 350 x 300
A-234	240	10	78	1900	8,6	230	50	54	620 x 350 x 315
B-304	295	10	77	2200	$\Delta 7,6 / \nabla 4,4$	230/400	50/60	54	620 x 350 x 315

OIL-FREE COMPRESSOR STATION 무급유콤프레샤

1. Ready for connection
2. Continuous running
3. Modular concept

The modular concept offers a variety of combinations with aggregates, pressure receivers and versions of control gear units (automatic condensate drain, release valve with solenoid-valve. Further information on request.

**UA -025 TA -100K
WA -038 HA -234K
WA -062 PB -304K
WD -040**

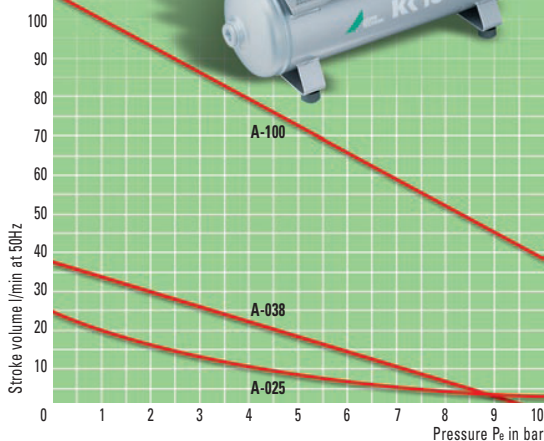

Type	Free air flow at 0 bar (l/min)	Nominal pressure PN (bar)	Noise level at PN dB (A)	Receiver Capacity (L)	Performance data of motor Voltage (V)	Frequency (Hz)	Protection class IP	Dimensions L x W x H (mm)
UA-025	25	7	55	3	230	50/60	54	330 x 330 x 320
WA-038	38	7	57	10	230	50/60	54	545 x 180 x 400
WA-062	70	7	59	10	230	50	20	545 x 180 x 400
WD-040	39	7	61	10	12 DC	—	20	545 x 180 x 400
WD-040	39	7	61	10	24 DC	—	20	545 x 180 x 400
TA-100K	100	8	68	25	230	50/60	54	620 x 365 x 620
HA-234K	230	10	78	55	230	50/60	54	920 x 350 x 640
PB-304K	295	10	78	90	400	50/60	54	1030 x 340 x 805